

PRODUCT INFORMATION

F550

TYPICAL PROPERTIES:

Basis Weight (17x22-500 Sheets)
 Caliper
 Brightness
 Smoothness
 Image Color
 Initial Activation Temperature (O.D.=0.2)
 Effective Activation Temperature (O.D.=0.8)
 Optimum Activation Temperature (O.D.=1.2)
 Resistance to Oils, Plasticizers
 Resistance to Alcohol, Solvents
 24 Hour Water Immersion

Representative Data

15.3# (57.6 g/m²) Avg
 2.40 Mills (61.0 Microns) Avg
 83.0% Avg
 300 sec Avg
 Black
 163 ± 9°F (73 ± 5°C)
 185 ± 9°F (85 ± 5°C)
 212 ± 9°F (100 ± 5°C)
 Not recommended
 Not recommended
 Fair


Test Method

TAPPI T-410
 TAPPI T-411
 TAPPI T-525
 TAPPI T-479


APPLICATION NOTES:

Ultra high sensitivity paper for use in low voltage fax machines.

Dynamic Sensitivity

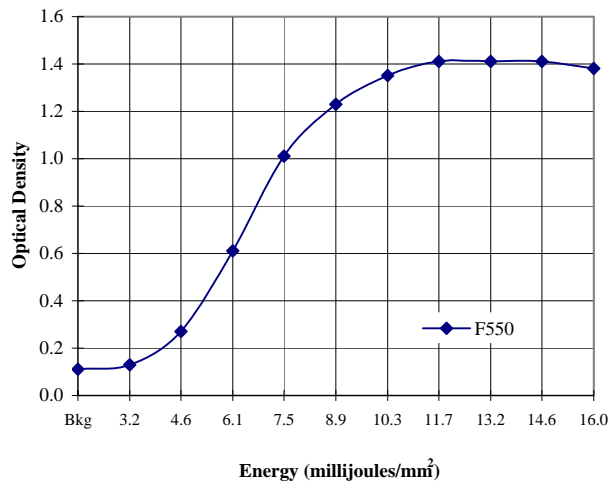

Static Sensitivity

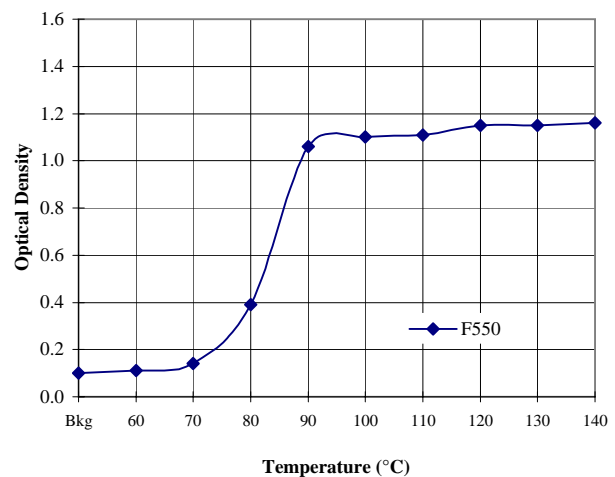

Dynamic Sensitivity: Atlantek 400, Medium Energy

The data described in this product information sheet represent product averages and should be utilized only after allowing for accepted industry variances. Vendor shall not be responsible for liability resulting from any deviation from this information, and all products should be pretested to ensure that products meet all intended requirements of specific end-use application.