

PRODUCT INFORMATION

KPT-1380

TYPICAL PROPERTIES:

Basis Weight (17x22-500 Sheets)
 Caliper
 Brightness
 Smoothness
 Image Color
 Initial Activation Temperature (O.D.=0.2)
 Effective Activation Temperature (O.D.=0.8)
 Optimum Activation Temperature (O.D.=1.4)
 Resistance to Oils, Plasticizers
 Resistance to Alcohol
 24 Hour Water Immersion

Representative Data

18.6# (70 g/m²) Avg
 3.30 Mils (83.8 Microns) Avg
 87% Avg
 400 sec Avg
 Black
 162 ± 9°F (72 ± 5°C)
 194 ± 9°F (90 ± 5°C)
 230 ± 9°F (110 ± 5°C)
 Excellent
 Excellent
 Excellent


Test Method

TAPPI T-410
 TAPPI T-411
 TAPPI T-525
 TAPPI T-479


APPLICATION NOTES:

A durable high sensitivity and high density direct thermal polypropylene film for use with high speed thermal printers. Synthetic substrate exhibits good environmental resistance, while exhibiting unique physical properties.

Dynamic Sensitivity

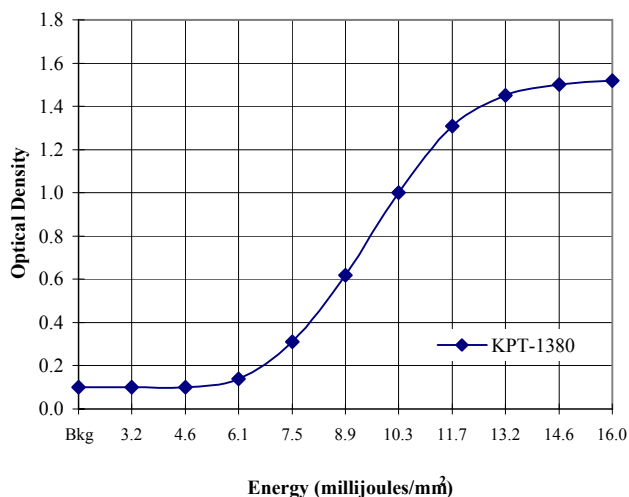

Static Sensitivity

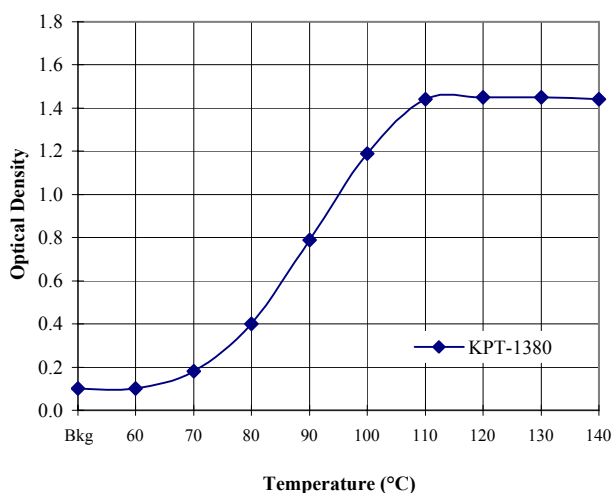

Dynamic Sensitivity: Atlantek 400, Medium Energy

The data described in this product information sheet represent product averages and should be utilized only after allowing for accepted industry variances. Vendor shall not be responsible for any liability resulting from any deviation from this information, and all products should be pretested to ensure that products meet all intended requirements of specific end-use application.