

PRODUCT INFORMATION

Polycash 11/3470

TOTAL CONSTRUCTION:

Basis Weight (24x36-500 Sheets)
Caliper

Representative Data

192# (312.5 g/m²) Avg
11.1 Mills (282 Microns) Avg

Test Method

TAPPI T-410
TAPPI T-411

DIRECT THERMAL SIDE:

Brightness	88% Avg	TAPPI T-525
Smoothness (Parker Print-surf)	1.3 µm Avg	TAPPI T-555
Image Color	Black	
Initial Activation Temperature (O.D.=0.2)	167 ± 9°F (75 ± 5°C)	
Effective Activation Temperature (O.D.=0.8)	185 ± 9°F (85 ± 5°C)	
Optimum Activation Temperature (O.D.=1.4)	212 ± 9°F (100 ± 5°C)	
Resistance to Oils, Plasticizers	Excellent	
Resistance to Alcohol	Excellent	
24 Hour Water Immersion	Excellent	


NON-THERMAL SIDE

Surface Tension 42 dynes/sq cm Avg


APPLICATION NOTES:

A durable 11 mil direct thermal synthetic card stock. Ultra-high sensitivity, high density direct thermal that suits high speed or low power printers. Not meant for use in high power print devices. Polypropylene base has very good "lay flat" characteristics. The reverse film side is well suited for UV offset and flexographic printability. Perfect for phone cards, transportation cards and other cash value applications where "declining balance" debit transactions occur, or where product life exceeds limits of normal paper ticket stocks.

Dynamic Sensitivity

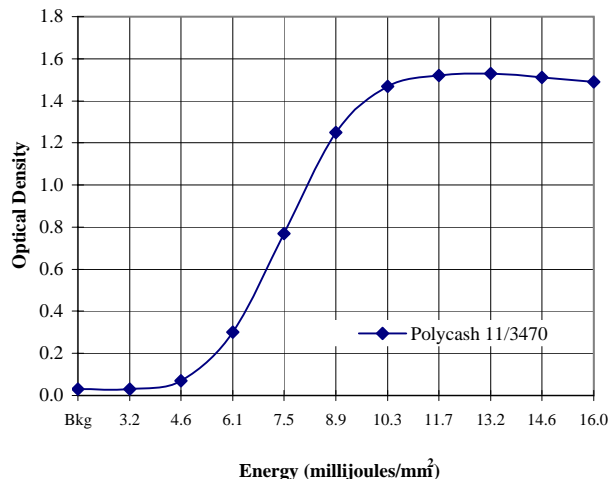

Static Sensitivity

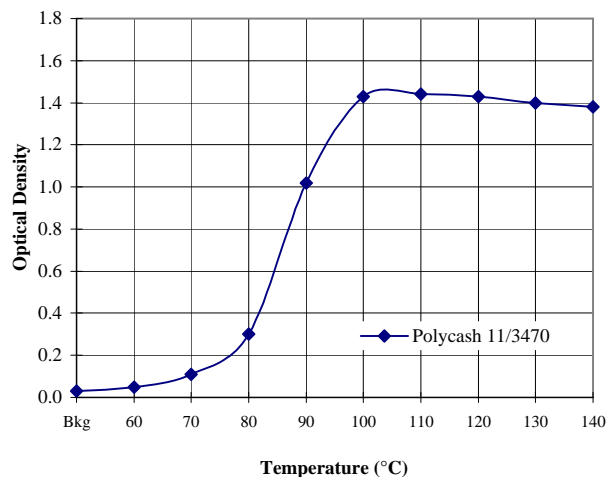

Dynamic Sensitivity: Atlantek 400, Medium Energy

Recommended for short-term moisture exposure only. Do not subject to abrasion when wet.

The data described in this product information sheet represent product averages and should be utilized only after allowing for accepted industry variances. Vendor shall not be responsible for liability resulting from any deviation from this information, and all products should be pretested to ensure that products meet all intended requirements of specific end-use application.