

PRODUCT INFORMATION

KTB-399

TYPICAL PROPERTIES:


Basis Weight (24x36-500 Sheets)
 Caliper
 Brightness
 Smoothness (Parker Print-surf)
 Image Color
 Initial Activation Temperature (O.D.=0.2)
 Effective Activation Temperature (O.D.=0.8)
 Optimum Activation Temperature (O.D.=1.4)
 Resistance to Oils, Plasticizers
 Resistance to Alcohol
 24 Hour Water Immersion

Representative Data	Test Method
173# (281 g/m ²) Avg	TAPPI T-410
10.8 Mills (274 Microns) Avg	TAPPI T-411
91% Avg	TAPPI T-525
1.6 μm Avg	TAPPI T-555
Black	
176 ± 9°F (80 ± 5°C)	
194 ± 9°F (90 ± 5°C)	
230 ± 9°F (110 ± 5°C)	
Excellent	
Very Good	
Excellent	


APPLICATION NOTES:

Collectible quality 11 mil ticket stock highlights a premium semi-gloss litho backside. Ultra-high sensitivity thermal coating also features improved heat resistance over standard thermal ticket stock. Topcoat enhances resistance to image degradation. Proven press printability using a wide variety of inks and processes on the back side. Perfect for theatre tickets, sponsored event tickets, prepaid calling cards, theme park and amusement passes, or where four or more color separations are required.

Dynamic Sensitivity

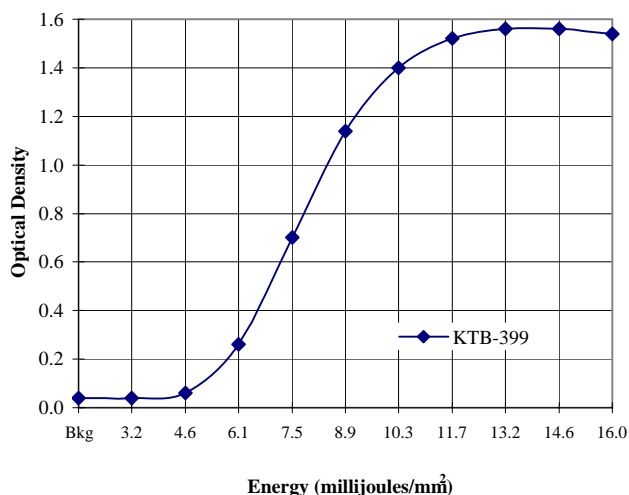

Static Sensitivity

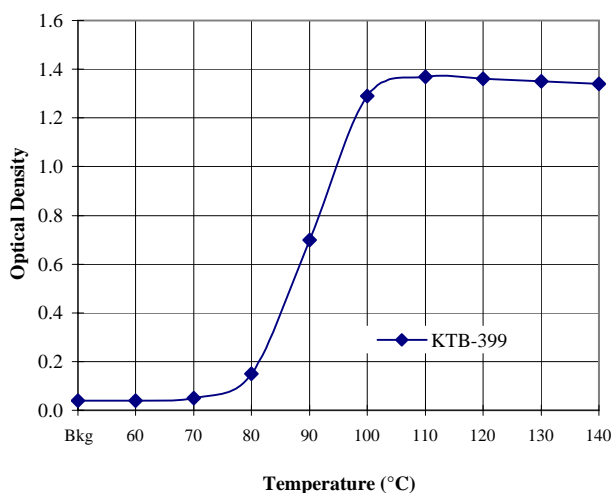

Dynamic Sensitivity: Atlantek 400, Medium Energy (Pattern 4)

The data described in this product information sheet represent product averages and should be utilized only after allowing for accepted industry variances. Vendor shall not be responsible for any liability resulting from any deviation from this information, and all products should be pretested to ensure that products meet all intended requirements of specific end-use application.