

## PRODUCT INFORMATION

## NT4

### TYPICAL PROPERTIES:

Basis Weight (24x36-500 Sheets)  
 Caliper  
 Brightness  
 Smoothness  
 Image Color  
 Initial Activation Temperature (O.D.=0.2)  
 Effective Activation Temperature (O.D.=0.8)  
 Optimum Activation Temperature (O.D.=1.2)  
 Resistance to Oils, Plasticizers  
 Resistance to Alcohol, Solvents  
 24 Hour Water Immersion

### Representative Data

63.9# (104 g/m<sup>2</sup>) Avg  
 4.30 Mils (109.2 Microns) Avg  
 86.0% Avg  
 250 sec Avg  
 Black  
 176 ± 9°F (80 ± 5°C)  
 189 ± 9°F (87 ± 5°C)  
 194 ± 9°F (90 ± 5°C)  
 Not recommended  
 Not recommended  
 Fair


### Test Method

TAPPI T-410  
 TAPPI T-411  
 TAPPI T-525  
 TAPPI T-479


### APPLICATION NOTES:

Lightweight ticket stock is non-topcoated for economy. High sensitivity coating insures that it will perform well in the broadest field of installed printers. Perfect for "use and dispose" applications like boarding pass, pay-on-foot parking, cinema, parking spitters, or kiosk ticketing where document life is short term or archive-ability is not needed. Works well in rolls or fanfolds.

### Dynamic Sensitivity

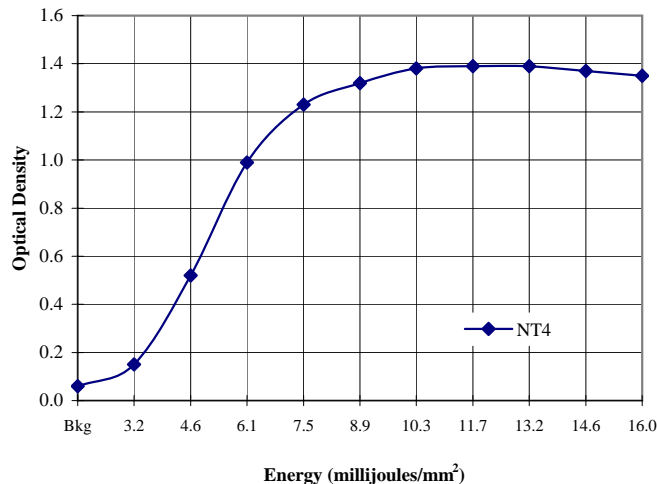

### Static Sensitivity

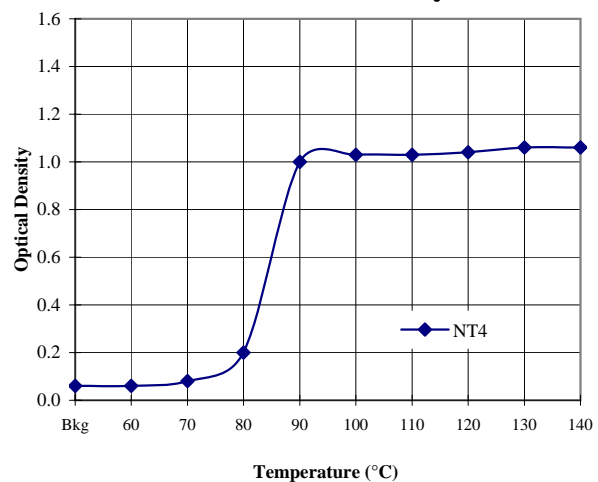

### Dynamic Sensitivity: Atlantek 400, Medium Energy

The data described in this product information sheet represent product averages and should be utilized only after allowing for accepted industry variances. Vendor shall not be responsible for liability resulting from any deviation from this information, and all products should be pretested to ensure that products meet all intended requirements of specific end-use application.