

PRODUCT INFORMATION

TOTE-200

TYPICAL PROPERTIES:

Basis Weight (17x22-500 Sheets)
 Caliper
 Brightness
 Smoothness (Parker Print-surf)
 Image Color
 Initial Activation Temperature (O.D.=0.2)
 Effective Activation Temperature (O.D.=0.8)
 Optimum Activation Temperature (O.D.=1.2)
 Resistance to Oils, Plasticizers
 Resistance to Alcohol, Solvents
 24 Hour Water Immersion

Representative Data

24# (90.2 g/m²) Avg
 3.85 Mils (97.8 Microns) Avg
 90% Avg
 1.5 µm Avg
 Black
 162 ± 9°F (72 ± 5°C)
 180 ± 9°F (82 ± 5°C)
 212 ± 9°F (100 ± 5°C)
 Not recommended
 Not recommended
 Not recommended


Test Method

TAPPI T-410
 TAPPI T-411
 TAPPI T-525
 TAPPI T-555


APPLICATION NOTES:

A standard sensitivity, middle weight, non-topcoated direct thermal paper for use in pari-mutuel wagering systems as well as kiosk, point-of-sale, and lightweight ticket applications.

Dynamic Sensitivity

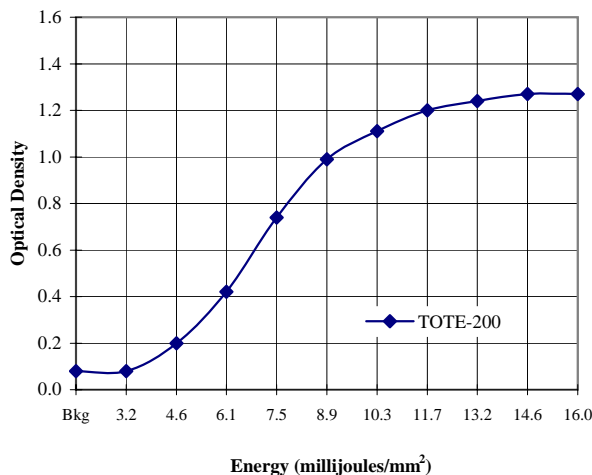

Static Sensitivity

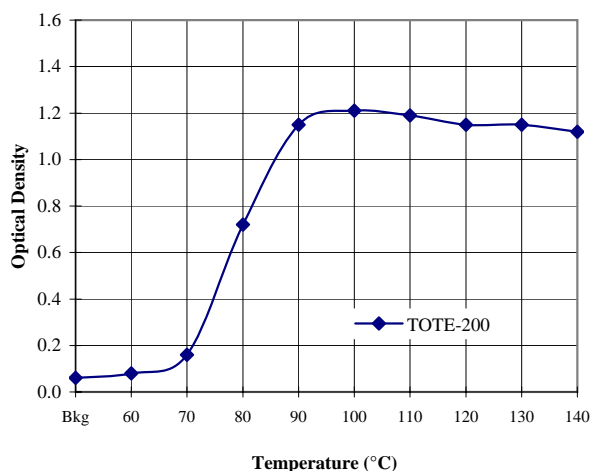

Dynamic Sensitivity: Atlantek 400, Medium Energy (Pattern 4)

The data described in this product information sheet represent product averages and should be utilized only after allowing for accepted industry variances. Vendor shall not be responsible for any liability resulting from any deviation from this information, and all products should be pretested to ensure that products meet all intended requirements of specific end-use application.