

PRODUCT INFORMATION

KIP37032

TYPICAL PROPERTIES:

Basis Weight (17x22-500 Sheets)
 Caliper
 Brightness
 Smoothness (Parker Print-surf)
 Image Color
 Initial Activation Temperature (O.D.=0.2)
 Effective Activation Temperature (O.D.=0.8)
 Optimum Activation Temperature (O.D.=1.4)
 Resistance to Oils, Plasticizers
 Resistance to Alcohol, Solvents
 24 Hour Water Immersion

Product Characteristics

21.0 ± 0.6 # (79.0 ± 2.3 g/m²) Avg
 3.2 ± 0.25 mils (81.3 ± 6 microns) Avg
 85.0 % Avg
 1.1 um Avg
 Black
 176 ± 9°F (80 ± 5°C)
 194 ± 9°F (90 ± 5°C)
 212 ± 9°F (100 ± 5°C)
 Excellent
 Excellent
 Excellent


Test Method

TAPPI T-410
 TAPPI T-411
 TAPPI T-525
 TAPPI T-555


APPLICATION NOTES:

A standard sensitivity, high density, topcoated and heat resistant direct thermal paper for use in medium to high speed thermal printers. Ideal for a variety of gaming, kiosk and retail applications.

Dynamic Sensitivity

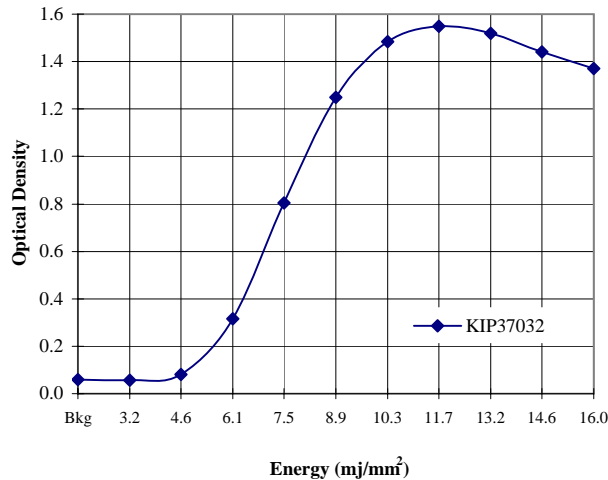

Static Sensitivity

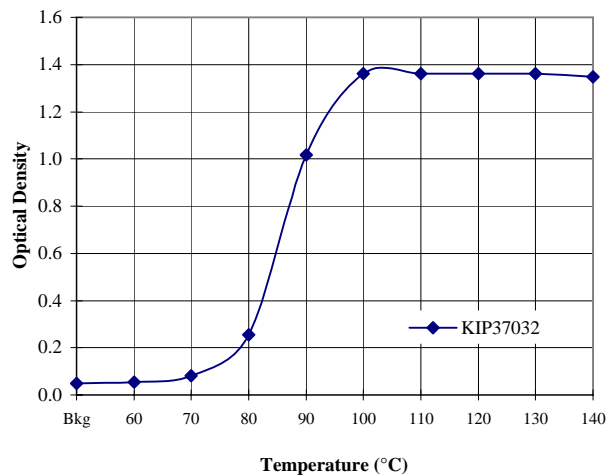

Dynamic Sensitivity: Atlantek 400, Medium Energy

The data described in this product information sheet represent product averages and should be utilized only after allowing for accepted industry variances. Vendor shall not be responsible for liability resulting from any deviation from this information, and all products should be pretested to ensure that products meet all intended requirements of specific end-use application.